REX PRO FLOORING



Stellar **Galaxy**


HOMOGENEOUS VINYL FLOORING

QUALITY SYSTEM


SIRIM

Stellar **Galaxy**


SIZE: 2.0mm x 2.0m x 20m

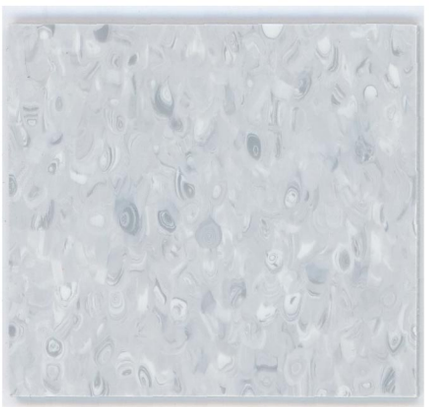


5039 Grey Moon

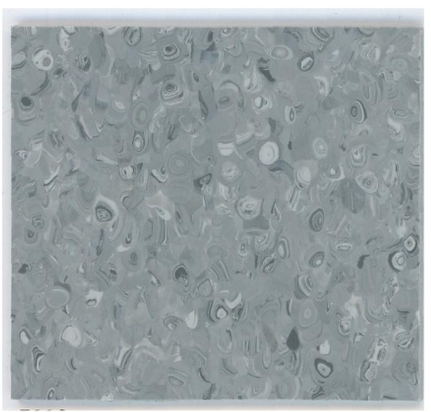


5038 Smoke Gray

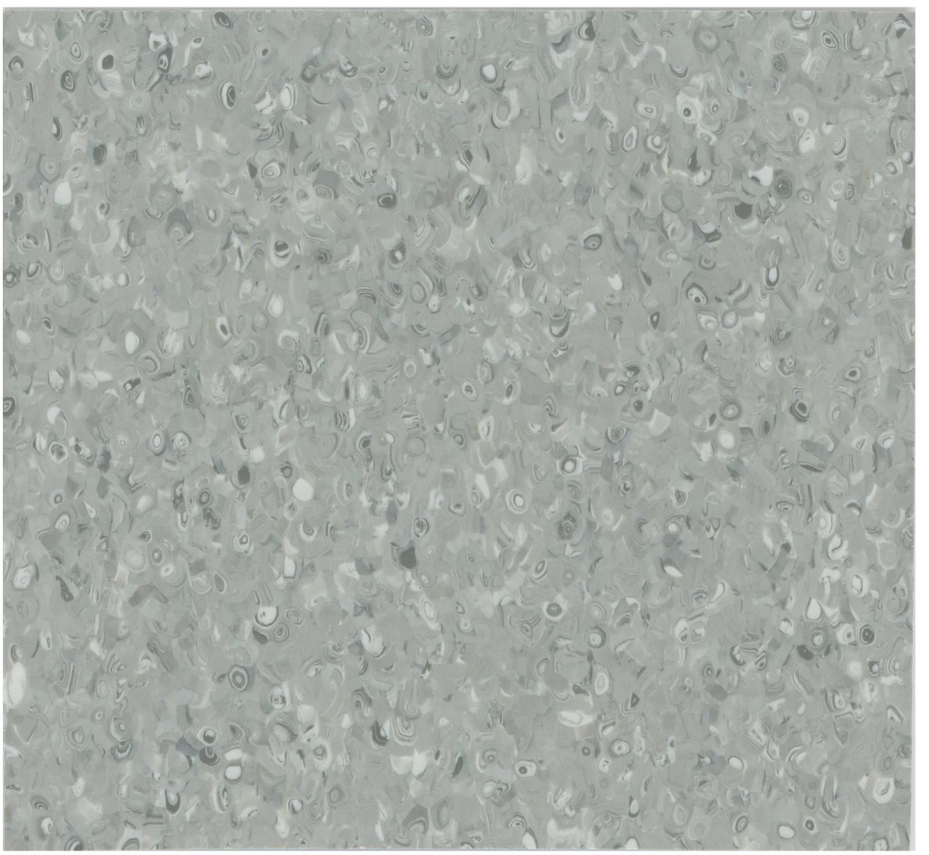

5047 Middle Marlyn

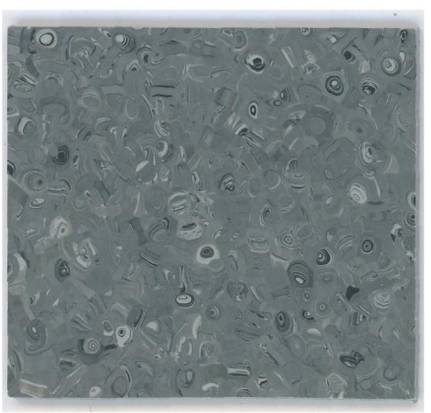

5037 Slate Gray

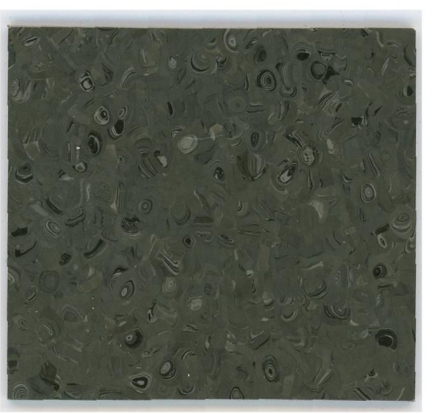

5044 Moccacino



5036 Galaxy



5034 Dark Green




5035 Springfield




5027 Pomegranate

Stellar **Galaxy**


SIZE: 2.0mm x 2.0m x 20m

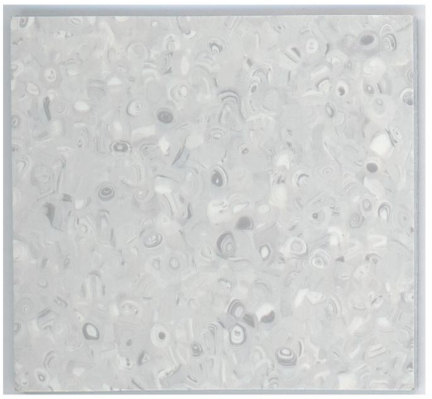


5041 White Sky

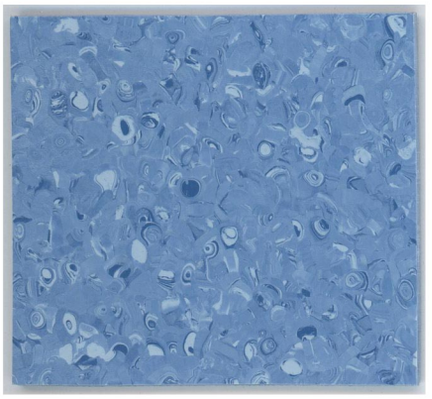


5024 Blue Lake

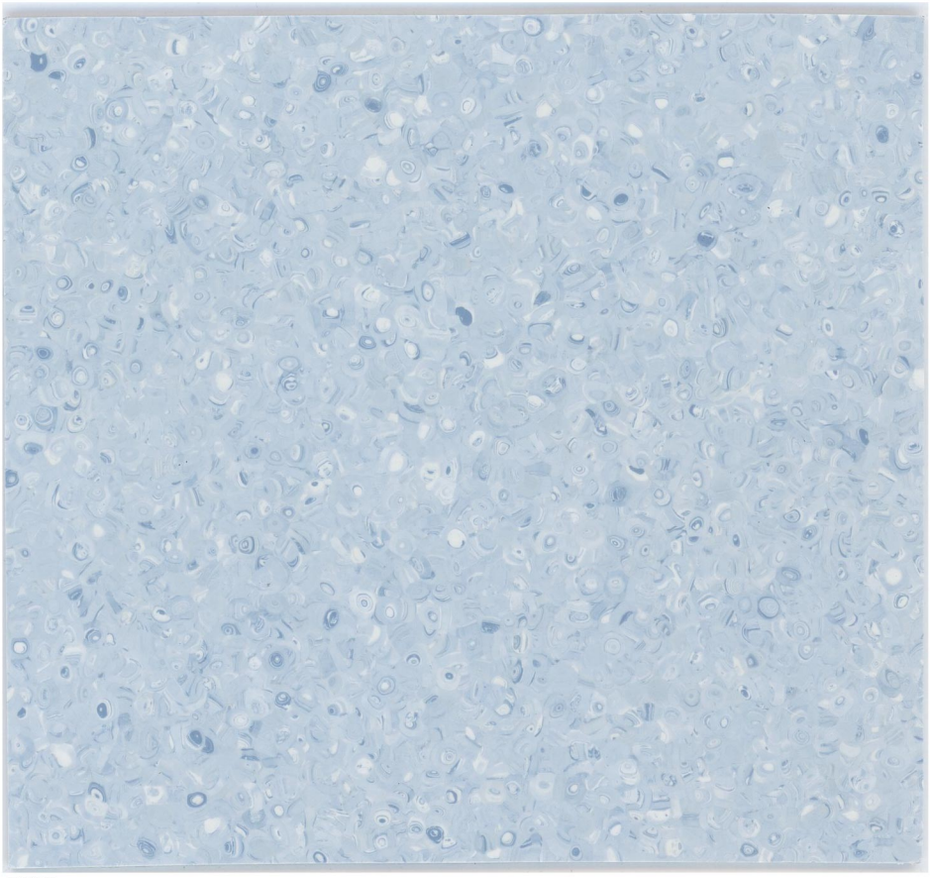


5025 Lagoon

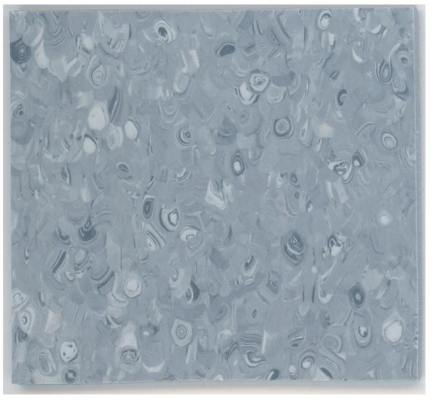

5040 Dove Grey

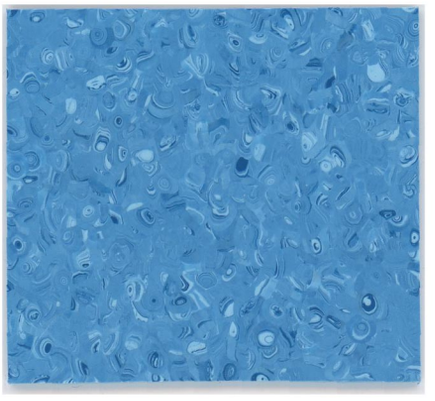


5022 Sailor

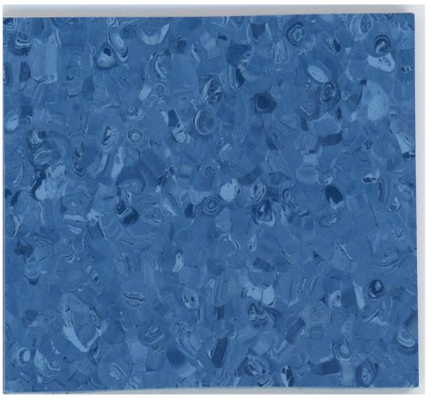

5023 Blue Galaxy



5032 Corn Flour

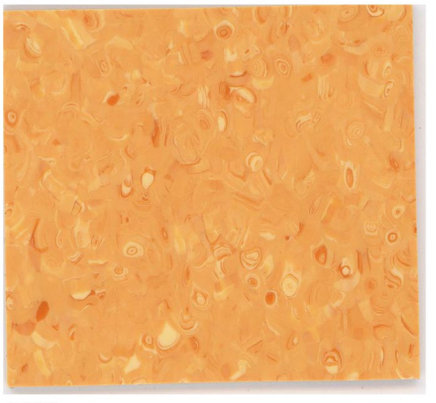

5029 Golden Sunset




5028 Navel

Stellar **Galaxy**

SIZE： 2.0mm x 2.0m x 20m



5031 Mocca Foam

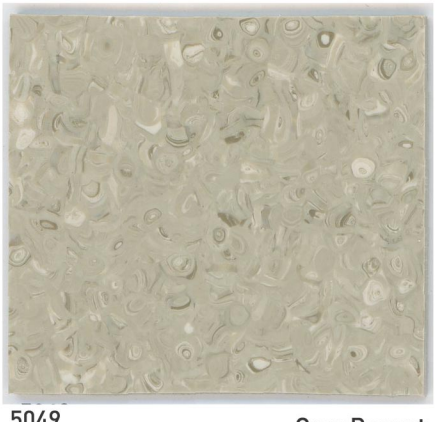

5049 Grey Peanut




5048 Fairydust




5046 Sesame Seed




5030 Toffee

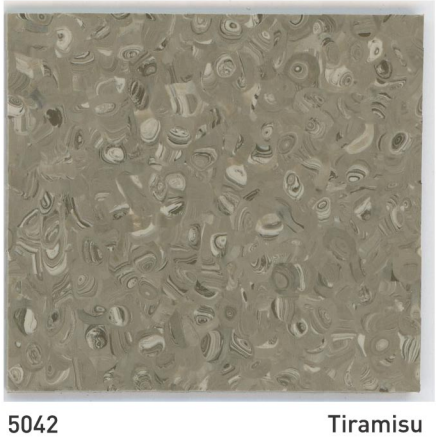

5042 Tiramisu

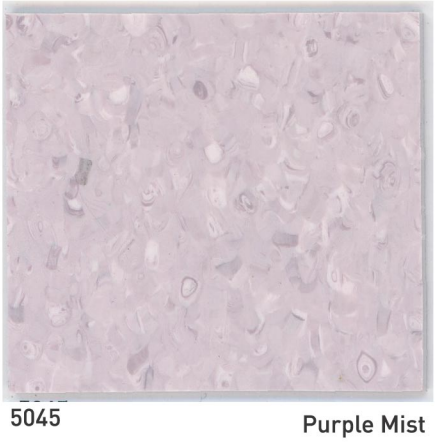

5045 Purple Mist

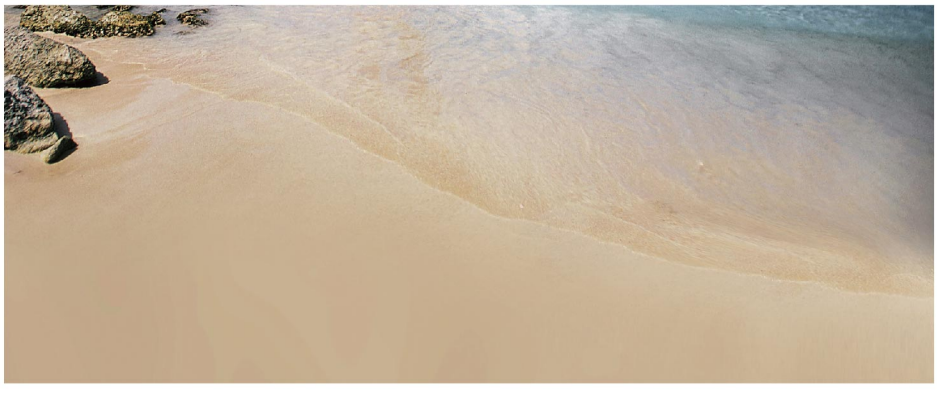

The sample is only for reference of color selection.
Please refer to the actual sample.

PRODUCT STRUCTURE



① Diamond-shield special coating

② Homogeneous uniform and dense texture

WELLNESS

Health

- Antibacterial activity {inhibits growth＞99%}

Security

- Excellent skid resistance

COMPOSITION

100%REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent

INDOOR AIR QUALITY

- TVOC emissons 10 times better than norms requirements {TVOC ＜100μg/m³after 28days}

2 m

Diamond-shield™ Special Coating

23-43

100% Recycle

QUALITY SYSTEM

SIRIM



1



Lotus Leaf Effect

Superhydrophobic surface to reduce surface tension, making it difficult for water-based residuals to permeate

2



Super Wear-Resisting

Hard and clear as gemstones,with high strength wear resistant special ingredients, leaving no traces of damage and scratches.

3



Resistance to the heel print

The synergistic effect makes heel marks and other stubborn stains harder to attach and easier to clean

4



Double Durability

Twice the average thickness of competing products making the surface protection system more durable for the ground.

Stellar **Galaxy**

PRODUCT SPECIFICATIONS

Description	Standard	Unit	Result
Type of flooring	EN 649		Homogeneous Sheet
Material			Polyvinyl chloride resin
Safety Requirements			
Fire rating	EN 13501-1	class	Bf1
Slip resistance	DIN 51130	group	R9-R10
Toxic testing	GB-18586-2001	-	Qualified
Performance data			
Roll width	ISO 26987-2008	m	2.0
Roll length	ISO 26987-2008	m	20
Overall thickness	ISO 26987-2008	mm	2
Total weight	ISO 26987-2008	kg / m^2	2.75
Wear resistance	EN 649	group	T
Residual indentation	ISO 26987-2008	mm	0.04
Dimensional stability	ISO10581-2019	-	MD -0.1% AMD 0%
Colour fastness	ISO105-B02: 2014	-	⩾6
Stain resistance	ISO26987: 2008 (E)	-	No stain
Special maintenance treatment		-	Diamond-shield special coating
Castor chair test	ISO4918：2016	-	No Damage
Classification			
Homes	ISO 26987-2008	class	23 heavy duty
Commercial	ISO 26987-2008	class	34 very heavy duty
Industrial	ISO 26987-2008	class	43 heavy duty
Indoor air quality			
Formaldehyde Emission	EN717-1：2004	-	Not Detected
DOP content	EN15777	-	Not Contain
Heavy metal	EN71-3	-	Not Contain
VOC harmful substances	GB 18586-2001	-	PASS

The sample is only for reference of color selection.
Please refer to the actual sample.

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. If need the subfloor must incorporate an effective Damp Proof Menbrane.The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24˚C.

MAINTENANCE

No wax is needed right after installation. Maintenance should be carried out regularly to keep the appearance and well durability of the floor. The floorcover ing should be maintained with regular sweeping and damp mooting using neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combines machine cleaning.

REACH
COMPOSITION
100%REACH compliant

INDOOR
AIR QUALITY

RECYCLED CONTENT
RECYCLED
CONTENT

RECYCLABILITY
100%

WELLNESS